

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE
REQUEST FOR FILING NATIONAL PHASE OF
PCT APPLICATION UNDER 35 U.S.C. 371 AND 37 CFR 1.494 OR 1.495

To: The Commissioner of Patents
and Trademarks
Washington, D.C. 20231

(Our Deposit Account No. 03-3975

(Our Order No. 60256 / 252337

C# / M#

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)

Atty. Dkt. PMS 252337 / T295050/42842/BR/LHT

M# / Client Ref.

From: Pillsbury Madison & Sutro LLP, IP Group

Date: April 30, 1998

This is a **REQUEST** for **FILING** a PCT/USA National Phase Application based on:

- | | | |
|--|---|---|
| 1. International Application
PCT/ FI96 /00585
↑ country code | 2. International Filing Date
31 October 1996
Day MONTH Year | 3. Earliest Priority Date Claimed
31 October 1995
Day MONTH Year
(use item 2 if no earlier priority) |
|--|---|---|
4. Measured from the earliest priority date in item 3, this PCT/USA National Phase Application Request is being filed within:
(a) [] 20 months from above item 3 date (b) [XX] 30 months from above item 3 date,
(c) Therefore, the due date (unextendable) is April 30, 1998
5. Title of Invention DATA TRANSMISSION METHOD
6. Inventor(s) PIRHONEN, Riku et al

Applicant herewith submits the following under 35 U.S.C. 371 to effect filing:

7. [X] Please immediately start national examination procedures (35 U.S.C. 371(f)).
8. [] A copy of the International Application as filed (35 U.S.C. 371(c)(2)) is transmitted herewith (file if in English but, if in foreign language, file only if not transmitted to PTO by the International Bureau) including:
a. [] Request;
b. [] Abstract;
c. pgs. Spec. and Claims;
d. sheet(s) Drawing which are [] informal [] formal of size [] A4 [] 13" [] 14"
9. [X] A copy of the International Application has been transmitted by the International Bureau.
10. A translation of the International Application into English (35 U.S.C. 371(c)(2))
a. [XX] is transmitted herewith including: (1) [XX] Request; (2) [XX] Abstract;
(3) 12 pgs. Spec. and Claims;
(4) 8 sheet(s) Drawing which are: [] informal [XX] formal of size [XX] A4 [] 11"
b. [] is not required, as the application was filed in English.
c. [] is not herewith, but will be filed when required by the forthcoming PTO Missing Requirements Notice per Rule 494(c) if box 4(a) is X'd or Rule 495(c) if box 4(b) is X'd.
d. [] Translation verification attached (not required now).
11. [X] PLEASE AMEND the specification before its first line by inserting as a separate paragraph:
--This application is the national phase of international application PCT/ FI96 / 00585,
filed October 31, 1996 which designated the U.S.--

12. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)), i.e., **before 18th month from first priority date above in item 3**, are transmitted herewith (file if in English but, if in foreign language, file only if not transmitted by the International Bureau) including:
13. ☒ PCT Article 19 claim amendments (if any) have been transmitted by the International Bureau.
14. ☐ Translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)), i.e., of claim amendments made before 18th month, is attached (required by 20th month from the date in item 3 if box 4(a) above is X'd, or 30th month if box 4(b) is X'd, or else amendments will be considered cancelled).
15. **A declaration of the inventor** (35 U.S.C. 371(c)(4))
a. ☐ is submitted herewith ☐ Original ☐ Facsimile/Copy
b. ☒ is not herewith, but will be filed when required by the forthcoming PTO Missing Requirements Notice
per Rule 494(c) if box 4(a) is X'd or Rule 495(c) if box 4(b) is X'd.
16. **An International Search Report (ISR):**
a. Was prepared by ☐ European Patent Office ☐ Japanese Patent Office ☒ Other
b. ☒ has been transmitted by the International Bureau to PTO.
c. ☒ copy herewith (2 pg(s).) ☒ plus Annex of family members (1 pg(s).).
17. **International Preliminary Examination Report (IPER):**
a. ☒ has been transmitted (if this letter is filed after 28 months from date in item 3) in English by the International Bureau with Annexes (if any) in original language.
b. ☒ copy herewith in English
c.1 ☐ IPER Annex(es) in original language ("Annexes" are amendments made to claims/spec/drawings during Examination) including attached amended:
c.2 ☐ Specification/claim pages # _____ ☐ Drawing Sheets # _____
c.3 ☐ Which resulted in cancellation of pages # _____ claims # _____
Dwg Sheets # _____
d. ☐ Translation of Annex(es) to IPER (required by 30th month due date, or else annexed amendments will be considered cancelled).
18. **Information Disclosure Statement** including:
a. ☐ Attached Form PTO-1449 listing documents
b. ☐ Attached copies of documents listed on Form PTO-1449
c. ☒ A concise explanation of relevance of ISR references is given in the ISR.
19. ☐ **Assignment** document and Cover Sheet for recording are attached. Please mail the recorded assignment document back to the person whose signature, name and address appear at the end of this letter.
20. ☐ Copy of Power to IA agent.
21. ☐ **Drawings:** _____ sheet(s) per set: ☐ 1 set informal; ☐ Formal of size ☐ A4 ☐ 11"
22. ☐ _____ (No.) **Verified Statement(s)** establishing "small entity" status under Rules 9 & 27
23. **Priority** is hereby claimed under 35 U.S.C. 119/365 based on the priority claim and the certified copy, both filed in the International Application during the international stage based on the filing in (country) FINLAND of:

<u>Application No.</u>	<u>Filing Date</u>	<u>Application No.</u>	<u>Filing Date</u>
(1) <u>955206</u>	<u>October 31, 1995</u>	(4) _____	_____
(2) _____	_____	(5) _____	_____
(3) _____	_____	(6) _____	_____

a. ☒ See Form PCT/IB/304 sent to US/DO with copy of priority documents. If copy has not been received, please proceed promptly to obtain same from the IB.
b. ☒ Copy of Form PCT/IB/306 attached.
24. Attached:

PTO/PCT Rec'd 18 AUG 1998

Page 1 of 2

#3

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

COMPLETION OF FILING NATIONAL PHASE OF PCT APPLICATION

UNDER RULE 35 USC 371 AND 37 CFR 1.494(C) OR 1.495(C)

BOX PCT

**COMPLETION
For PCT Cases Only**

In re PATENT APPLICATION of

Inventor(s): PIRHONEN et al.

Appln. No.: 09 | 066,359
Series Code ↑ | Serial No. ↑

Attn: **Application Division**
Atty. Dkt. PMS | 252337 | T295050
M# | Client Ref

National Phase Field

Based on **PCT** | FI96 | 00585
↑ Country Code

(Our Deposit Account No. 03-3975)

(Our order No. 60256 | 252337)
C# | M#

Title: DATA TRANSMISSION METHOD

Date: August 18, 1998

FILING OF ITEM(S) LATE IN PCT/USA NATIONAL CASE

Hon. Commissioner of Patents
and Trademarks
Washington, DC 20231

Sir:

The following completes the filing of the subject application under Rule 494(c)/495(c). Please accept the following attached items:

1. Missing Requirements Notice (PCT/DO/EO/905) ☒ copy attached ☐ not yet received
2. ☒ **Signed Declaration** ☒ Original ☐ Facsimile/Copy ☐ with spec/claims attached
3. ☐ **Translation** of the International Application into English including:
 - a. ☐ Request;
 - b. ☐ Abstract
 - c. ☐ pgs. Spec. and Claims;
 - d. ☐ Translation verification
 - e. ☐ sheets Drawing which are: ☐ informal ☐ formal of size ☐ A4 ☐ 11"
4. ☐ a copy of **International Search Report (ISR)** attached (☐ page(s))

a. ☐ plus Annex of family members (☐ page(s))

08/20/1998 PVOLPE 00000093 09066359

01 FC:134 130.00 DP

02 FC:988 285.00 DP

03 FC:968 270.00 DP
5. **Information Disclosure Statement** including
 - a. ☐ From PTO-1449 listing documents
 - b. ☐ Copies of document(s) listed on Form PTO-1449
 - c. ☐ A concise explanation of ISR references is given in the ISR
6. ☒ **Assignment** and cover sheet. Please return the recorded assignment to the undersigned.
7. ☐ Copy of Power to international application agent.
8. ☐ (No.) Verified Statement(s) establishing "small entity" status under Rules 9 & 27.
9. ☐ Formal Drawings: ☐ sheet(s) ☐ informal; ☐ formal of size: ☐ A4 ☐ 11"
10. ☒ Please immediately start national examination procedures (35 USC 371(f))

DATA TRANSMISSION METHOD

FIELD OF THE INVENTION

The present invention relates to a data transmission method in a digital cellular radio network, the method comprising the step of channel
5 coding the information to be transferred for transmission.

PRIOR ART

Requirements set for data transmission methods are continuously increasing. This particularly concerns wireless data transmission systems, such as cellular communication systems of which ever more versatile services are
10 required, such as various kinds of data services.

Conventionally, wireless data transmission systems have only been used for speech transmission. An increase in the number of various kinds of services to be transferred means, as far as wireless services in particular are concerned, that the system must be able to transmit signals with different
15 capacities over the radio path. Consequently, an efficient operation is required of the data transmission system in an environment where transmissions of a multitude of service types are transferred.

Data transmission on a radio channel with a limited bandwidth is a kind of compromise between bit error rate, indicating transmission quality, and a
20 net user data throughput. The bit error rate may be decreased by increasing channel coding which adds redundancy, i.e. information less important from the point of view of the user, to the information to be transmitted. If the number of bits to be transmitted in a time unit is restricted, the net user data throughput is reduced with redundancy.

For example in the GSM system, the data rate of a full rate channel is 22.8 kbit/s on the radio path. The coding methods used reduce the data rate to 12 kbit/s and 6 kbit/s, which correspond to user data rates of 9.6 kbit/s and 4.8 kbit/s, i.e. the services TCH/F9.6 and TCH/F4.8. The output data to be transmitted over the radio path is transferred forward from base stations to base
25 station controllers and the center, and the input data, in turn, from the center to a base station controller and further to a base station for transmission over the radio path. On such fixed transmission links, transmission errors are much less probable than on the radio path, and that is why there is usually no need to employ a particular error-correcting coding on them. To minimize transmission
30 costs, it is beneficial to perform rate adaptation to the lowest data rate employed
35

by the system, for example to 16 kbit/s in the case of TCH/F9.6. Figure 1 illustrates a TRAU frame which is important from the point of view of implementing the rate adaptation, i.e. the frame in which the user data is transmitted on the fixed connections between a base station and a TRAU (Transcoder / Rate Adaptation Unit). The frame comprises 40 octets. Synchronization bits are marked with S, bits assigned to user data with D, and control and spare bits have been left white.

Apart from the intentional redundancy described above, present-day GSM data services have spare data in the user information. In a transparent service, the surplus is constituted by flux control signalling, and in a non-transparent service by radio link protocol (RLP) frame headers and L2R flux control. In both cases, the user will have a data rate of no more than 9.6 kbit/s or 4.8 kbit/s to use, depending on whether a TCH/F9.6 or a TCH/F4.8 service is in question. At this moment, the user has no access to a higher data rate in GSM type of networks, even though high demands exist for this with data services becoming more common.

There are several apparatuses requiring higher data rates, because the data rates in fixed data networks have been higher. A typical data rate employed in fixed telephone networks is 14.4 kbit/s, which e.g. ITU V.32 bis and V.34 modems and telefax terminals of group 3 may use.

In the GSM type of networks, the aim is to implement higher data rates in the near future, and currently it is known to apply a so-called multi-slot technique for this purpose. This means that more than one time-slot could be assigned to users, with the natural result of an increased user data rate. Utilizing many time-slots is technically complicated to implement, particularly in mobile stations, and especially if the number of time-slots exceeds two.

CHARACTERISTICS OF THE INVENTION

It is an object of the present invention to implement a data rate of 14.4 kbit/s in cellular radio systems of the GSM type so that only one time-slot is used for transmitting user data.

This object is achieved by a method of the type set forth in the introduction, characterized in that channel coding comprises grouping bits to be transmitted in blocks having the minimum size of 288 bits, carrying out convolutional coding for said blocks with a code rate of $\frac{1}{2}$ by using GSM convolutional coding polynomes, and puncturing the bits obtained by deleting

bits from each block so that blocks containing no more than 456 bits will be obtained.

The method according to the invention provides a multitude of advantages. By the method of the invention, a desired data rate may be achieved without any large-scale modifications to existing networks. As the user needs one time-slot only, the resources and capacity of the network are used efficiently.

In the preferred embodiment of the invention, the information to be transmitted is transcoded by combining two subsequent transcoding frames into one frame, and by using some of the bits that would in case of individual frames be used for synchronizing the latter frame for transferring the information to be transmitted in this case. In a second preferred embodiment of the invention, the information to be transmitted is transcoded so that when generating the transcoding frame, comprising a group of data octets, the first bit of each data octet is used for transferring the information to be transmitted.

DESCRIPTION OF THE DRAWINGS

In the following, the invention will be described in more detail with reference to the accompanying drawings, in which

Figure 1 illustrates a conventional TRAU frame described above,

Figure 2 illustrates a cellular radio system to which the method according to the invention may be applied,

Figures 3a - 3c illustrate alternative locations for the transcoding unit,

Figures 4a and 4b illustrate transforming of data rate at different Abis interfaces,

Figure 5 illustrates a new frame generated from two TRAU frames,

Figure 6 illustrates a new type of TRAU frame,

Figure 7 illustrates implementing channel coding according to the invention,

Figure 8 illustrates a possible puncturing for the coded bits,

Figures 9a and 9b illustrate two frames of the new type, and

Figure 10 illustrates a second example of a cellular radio system to which the method of the invention may be applied.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Figure 2 illustrates the structure of a cellular radio system of the GSM type. The invention may advantageously be applied to a digital cellular radio system whose channel and frame structure resembles the GSM system.

- 5 The system comprises a group of terminal equipments 202 - 206 which have a connection 208 - 212 to a base station 200. The base station 200 communicates via digital transmission links 218 with a base station controller 214, which has one or more base stations under its control. The base station controller 214, in turn, communicates via digital transmission links 220 with a
- 10 mobile services switching center 216, which has a further connection 222 to other parts of the network.

- The interface 218 between the base station 200 and the base station controller 214 is referred to as an Abis interface. Similarly, the interface 220 between the base station controller 214 and the mobile services switching
- 15 center is referred to as an A interface. There are two common ways to implement these interfaces. What is essential to both these ways is the transfer rate used at the Abis interface, which is either 64 kbit/s or 16 kbit/s. For the 64 kbit/s transfer rate employed for switching by the center 216, the signal must be transcoded, and thus the location of the transcoding unit TRAU
- 20 in the network depends on the transfer rate employed at the Abis interface. Figures 3a-3c illustrate different alternatives for the network structure at different transfer rates.

- Figure 3a illustrates an alternative in which the Abis interface 218 between the base station 200 and the base station controller 214 is
- 25 implemented at the rate of 64 kbit/s. In such a case, the transcoding unit TRAU 300 is located at the base station 200. This means that the connection 220 between the base station controller 214 and the mobile services switching center 216 is also 64 kbit/s.

- Figure 3b illustrates an alternative in which the Abis interface 218 between the base station 200 and the base station controller 214 is
- 30 implemented at the rate of 16 kbit/s. In such a case, the transcoding unit TRAU 300 is located at the base station controller 214. This means that the connection 220 between the base station controller 214 and the mobile services switching center 216 has the rate of 64 kbit/s.

- 35 Figure 3c illustrates a second alternative in which the Abis interface 218 between the base station 200 and the base station controller 214 is

implemented at the rate of 16 kbit/s. The transcoding unit TRAU 300 in this case is located at the mobile services switching center 216. The connection 220 between the base station controller 214 and the mobile services switching center 216 is thereby 16 kbit/s.

5 In the method according to the invention, the aim of which is to enable a higher transfer rate for the user data in a cellular radio system, a new way is introduced for carrying out coding both on the radio path and in the transcoding unit described above. The modifications caused by the new coding on existing systems remain small, but they enable a 14.4 kbit/s transfer
10 rate for the user. The method of the invention will below be first examined in connection with transcoding.

Figures 4a and 4b illustrate a transformation in the transfer rate with different Abis interfaces. Figure 4a illustrates network implementation in case of a 64 kbit/s Abis interface 218. In such a case transcoding is carried out in
15 connection with the base station 200 and is a linear process utilizing ITU-T V.110 rate transformation specification. The signal received from the radio path 208 has been coded according to specifications of the traffic channel 400 at the rate of 22.8 kbit/s. The user data rate 402 is consequently 14.4 kbit/s which is first transformed to the rate of 32 kbit/s 404 according to V.110
20 recommendations, and from that further to the rate of 64 kbit/s 406. As the transcoder is in this case located at the base station 200, there is no need for separate TRAU frames.

Figure 4b illustrates a network implementation with a 16 kbit/s Abis interface. In this case the transcoder 300 is external to the base station 200,
25 and therefore traffic over the Abis interface 218 takes place by TRAU frames. As there exists no rate transformation scheme from a user rate of 14.4 kbit/s to the rate of 16 kbit/s at the Abis interface, the method of the invention comprises a new transformation and a TRAU frame corresponding thereto. The signal received from the radio path 208 has been coded according to
30 specifications of the traffic channel 400 at the rate of 22.8 kbit/s. The user data rate 402 is therefore 14.4 kbit/s, which is transformed 404 according to V.110 specifications to an intermediate rate of 32 kbit/s. For the Abis interface, a new type of 16 kbit/s TRAU frame 408 is generated which is herein referred to as an N-TRAU frame. In the transcoding unit the N-TRAU frame is disassembled
35 according to V.110 recommendations via 404 an intermediate rate of 32 kbit/s

to the rate of 64 kbit/s 406. In the above, it is not compulsory to use the intermediate rate of 32 kbit/s in the base station 200.

The TRAU frame is transmitted over the Abis interface at 20 ms intervals, and it contains 320 bits in all. If the desired user data rate is 14.4 kbit/s, 288 bits of data bits should be transmitted within 20 ms. There are four different known transcoding frames used in the GSM system, one of which is illustrated in Figure 1. None of these frames utilizes the 16 kbit/s capacity in the best possible way. If all available data bits are employed of the known frames, except the spare control bits, 270 bits will be obtained. If 9 spare bits are included from the control field of the data frame, 279 bits will be obtained, which is not enough.

The method according to the invention utilizes two new type of transcoding frame alternatives, in which bits intended for synchronization are employed in data transmission. Further in the method according to the invention, synchronization of the transcoding frame is changed so as to obtain synchronization with a smaller number of actual synchronization bits.

Figure 5 illustrates a new frame generated from two TRAU frames. The bits reserved for synchronizing are denoted by the letter S, the bits reserved for the user data with the letter D, and the control and spare bits have been left white. Each conventional TRAU frame has a four-octet-long synchronization and control part positioned at the beginning of the frame. When combining several frames, the control part may be reduced proportionally. If two frames are combined and transmitted together, a rate of 14.4 kbit/s requires $2 \cdot 288$ i.e. 576 bits per 40 ms. Two conventional frames in succession provide $2 \cdot 270$ bits, i.e. there are 36 bits lacking. In the solution according to the invention, the control part of the latter frame to be combined is used for data transmission. Furthermore, from the unused control bits of the first frame, 6 bits are used for data transmission. This will produce 576 bits in all, whereby there will still be 3 unused control bits. In the solution according to the invention, as shown by Figure 5, a double length frame has at the beginning two full octets of synchronization bits, one synchronization bit at the beginning of the third octet, after which 8 control bits follow. After this, all the bits are data bits except the first bit in every other octet, this bit being reserved for synchronization.

Figure 6 illustrates a new 20 ms TRAU frame. The bits reserved for synchronization are denoted by the letter S, the bits reserved for user data

with the letter D, and the control and spare bits have been left white. In the solution according to this embodiment, following the control part all the bits are used for data transmission, including the first bit of every octet. In this manner, an adequate number of bits may be obtained for data transmission. A

5 drawback concerning this solution is that the actual synchronization bits are all located at the beginning of the frame. In the solution according to the invention it is possible to improve the synchronization so that the transcoding frame is synchronized by using those bits of the frame which have a known value. Such bits are represented by frame type indicator bits (4 bits), a channel type

10 indicator (1 bit) and an intermediate rate adaptation indicator (2 bits). By utilizing these bits, the functioning of the synchronization may be ensured. A second method according to the invention involves counting a short checksum for some of the data octets used for transferring the information to be transmitted, and transferring the CRC value thus obtained by using spare

15 control bits, and utilizing the CRC value in synchronizing the transcoding frame.

It is yet another embodiment of the method according to the invention to use fill bits to break bit sequences consisting of the same bit: such sequences could otherwise be interpreted as TRAU frame synchronization

20 patterns. One way is to use frames according to ITU recommendation V.42 or frames modified based on that. As the V. 42 frames are so constructed that they do not contain long sequences of 1s, the user data must be inverted prior to transmission, and deinverted following the transmission in order for them not to contain long sequences of zeros.

25 In the following, the method of the invention will be examined in connection with channel coding. Figure 7 offers a block diagram illustration of implementing channel coding according to the invention. The figure shows the two inventive transcoding frames, both the 20 ms frame 700 and the double length frame 702. In the 20 ms frame, 320 bits are transmitted during 20 ms, and 288 payload bits are rate adapted 408 to the rate of 14.4 kbit/s. In a

30 similar manner, the double length frame comprises 640 bits during 40 ms, and 576 payload bits are rate adapted 408 to the rate of 14.4 kbit/s. Next, block coding 704 is carried out by using 288 bits as the size of the block in the solution according to the invention. In the block coding, 4 tail bits are added.

35 Convolutional coding 706 is carried out at the coding rate of $\frac{1}{2}$, by using the same GSM convolutional coding polynomes as at the data rate of 9.6 kbit/s.

$$G0 = 1 + D^3 + D^4$$

$$G1 = 1 + D + D^3 + D^4$$

After the coding, 584 bits will thereby be obtained, out of which 128 bits will next 708 be punctured off, and the remaining 456 bits will be fed further to be interleaved 710, to burst formatting 712, to be modulated 714, and further to the radio path 716. The puncturing is illustrated in the example of Figure 8, in which bits denoted with the letter P are deleted from the 584 bits obtained from the convolutional coding, whereby 456 bits remain.

Next, the second preferred embodiment according to the invention will be examined. In this embodiment, the information to be transmitted is transferred in the transfer system by generating a transcoding frame having a total length of 640 bits, and the information conveyed by which is applied to a channel coder as two blocks having the length of 290 bits. This is illustrated in Figure 9a. The bits reserved for synchronization are denoted with the letter S, the bits assigned to the user data are denoted by D, and the control and spare bits have been left white. The frame therefore consists of the first 900 and the second 902 block.

To both of the blocks, an identifier may be inserted which indicates whether the first or the second block of the frame is in question. The block identifier is in a predetermined position in the block, and the identifier of the second block is advantageously formed by inverting the identifier of the first block. The identifiers are illustrated in Figure 9b. The identifiers may advantageously be located in bits 1 and 3. It is also possible to insert the identifiers only at the base station to the signal transmitted to the air interface.

The first bits 1, 2, 3 and 4 of both the blocks in the frame may advantageously be employed in transferring supplementary information over the air interface. Such supplementary information includes synchronization of half frames, sub-channel numbering or transferring inter-network synchronization information over the air interface. The supplementary information bits may also be used for signalling discontinuous transmission.

At the base station, the bit of the first block in the frame, indicating discontinuous transmission, may advantageously be replaced prior to channel coding by a fixed-value bit which is inverse to the bit transmitted at the same position in the latter block.

According to a preferred embodiment of the invention, channel coding comprises grouping bits to be transmitted into blocks having the size of

290 bits, adding 4 tail bits to the blocks, carrying out convolutional coding for said blocks with a $\frac{1}{2}$ code rate by employing GSM convolutional polynomes so that after the coding the block size is 588 bits, and puncturing the coded bits obtained by deleting 132 bits from each block.

- 5 In the following, Figure 10 will be examined which illustrates the structure of cellular radio systems of the GSM type. The figure shows a mobile station MS which communicates with a base station BTS. The base station BTS communicates via digital transmission links with a base station controller BSC which has one or more base stations under its control. The base station
10 controller BSC, in turn, communicates via digital transmission links with a mobile services switching center MSC, which further has a connection via 222 a network interworking connection 1000 to other parts of the network.

- As mentioned, the interface between the base station BTS and the base station controller is referred to as an Abis interface. The interface
15 between the base station controller BTS and the mobile services switching center MSC is referred to as an A interface. In a solution according to a preferred embodiment of the invention, the transfer frame is generated at the network interworking unit 1000. The frame is transferred over the A interface, the TRAU receives and transmits the frame further, and the frame is
20 transferred over the Abis interface, and the base station receives the frame. In a prior art solution, the frame is only generated in the TRAU at the base station controller. In the solution according to the present invention, the frame may also include a radio link protocol frame (RLP frame). This is an advantageous solution, as the amount of overhead decreases, there is no
25 need to separate the RLP frames with a dedicated frame separator if the TRAU frame is of equal size.

Although the invention is in the above described with reference to the example of the accompanying drawings, it is obvious that it may be varied in many ways within the inventive idea set forth in the attached claims.

CLAIMS

1. A data transmission method in a digital cellular radio network, the method comprising the step of channel coding the information to be transferred for transmission, **characterized** in that the channel coding
5 comprises
grouping bits to be transmitted in blocks having the minimum size of 288 bits,
carrying out convolutional coding for said blocks with a code rate of $\frac{1}{2}$ by using GSM convolutional coding polynomes, and
10 puncturing the bits obtained by deleting bits from each block so that blocks containing no more than 456 bits will be obtained.
2. A method as claimed in claim 1, **characterized** in that the block size after the convolutional coding is 584 bits, and that the coded blocks obtained are punctured by deleting 128 bits from each block.
3. A data transmission method in a digital cellular radio network, the method comprising the step of channel coding the information to be transferred for transmission, **characterized** in that the channel coding
15 comprises
grouping bits to be transmitted into blocks having the size of 290
20 bits,
inserting 4 tail bits to the blocks,
carrying out convolutional coding for said blocks with a $\frac{1}{2}$ code rate by employing GSM convolutional polynomes so that after the coding the block size is 588 bits, and
25 puncturing the coded bits obtained by deleting 132 bits from each block.
4. A method as claimed in claim 1 or 3, **characterized** in that the information to be transmitted is transferred in the transfer system by generating one frame from two transcoding frames by using a part of
30 synchronization and control bit positions of the latter frame in the information transfer.
5. A method as claimed in claim 1 or 3, **characterized** in that the information to be transmitted is transferred in the transfer system by generating a transcoding frame whose first two octets form a synchronization
35 pattern that consists of zeros, said frame containing control bits and at least 288 bits of information to be transmitted.

7. A method as claimed in claim 5, **characterized** in that a
5 short checksum is calculated for some of the data octets used for transferring
the information to be transmitted, and that the CRC value thus obtained is
transferred by using spare control bits, and that the CRC value is utilized in
synchronizing the transcoding frame.

9. A method as claimed in claim 1 or 3, **characterized** in that each information bit is inverted prior to the transfer and deinverted after the transfer.

20 11. A method as claimed in claim 10, **characterized** in that an identifier is inserted to both of the blocks that indicates whether the first or the second block of the frame is in question.

13. A method as claimed in claim 12, **characterized** in that the first bits (1, 2, 3, 4) of both the frames are used for transferring supplementary information over the air interface.

15. A method as claimed in claim 13, **characterized** in that the supplementary information bits are used for transmission of synchronization information.

5

tr

tr

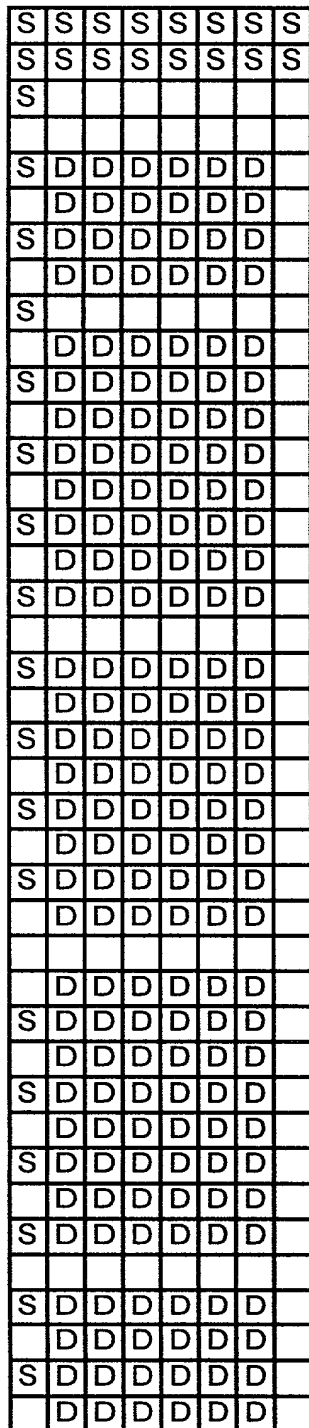


Fig. 1

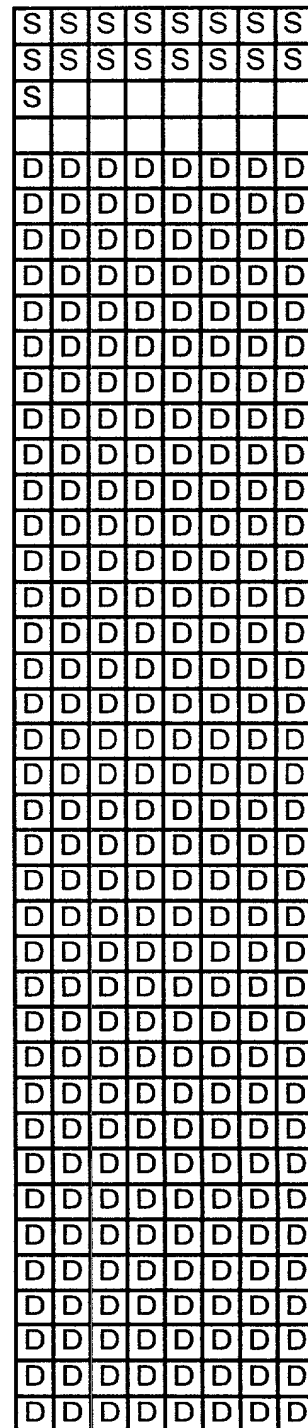


Fig. 6

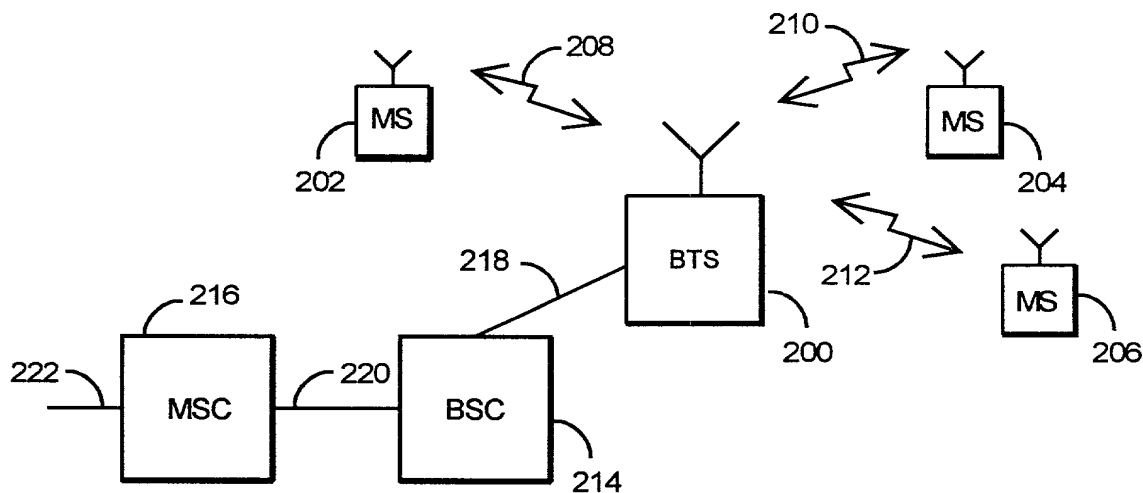


Fig. 2

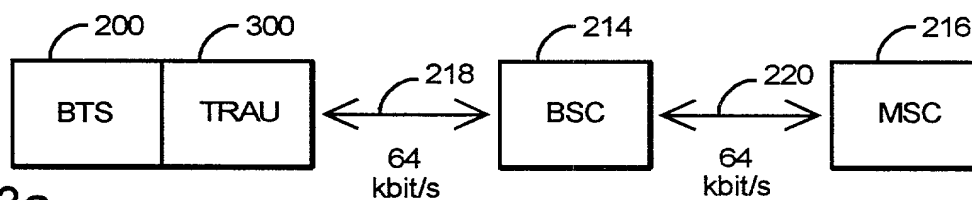


Fig. 3a

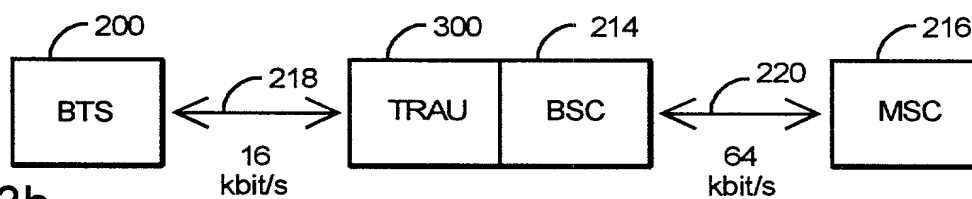


Fig. 3b

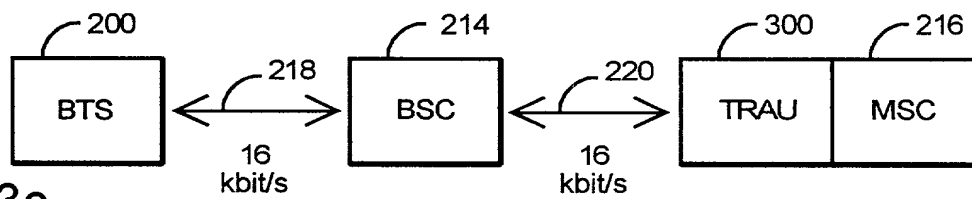


Fig. 3c

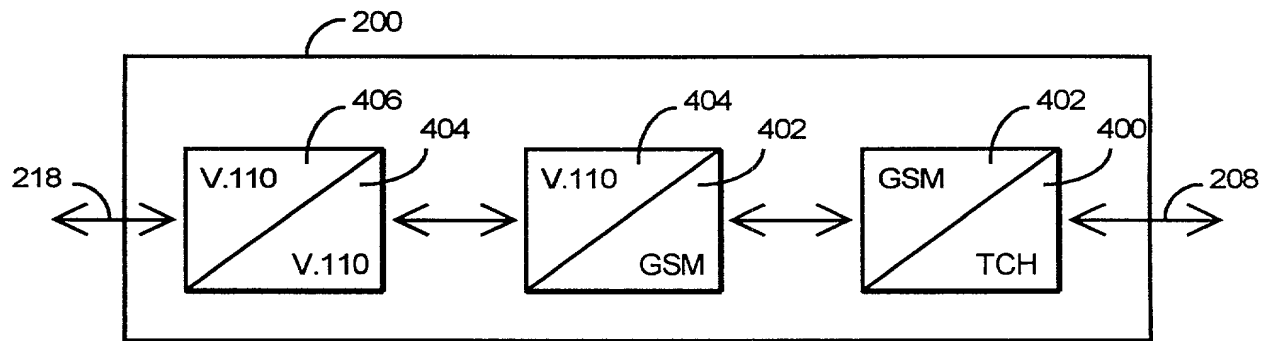


Fig. 4a

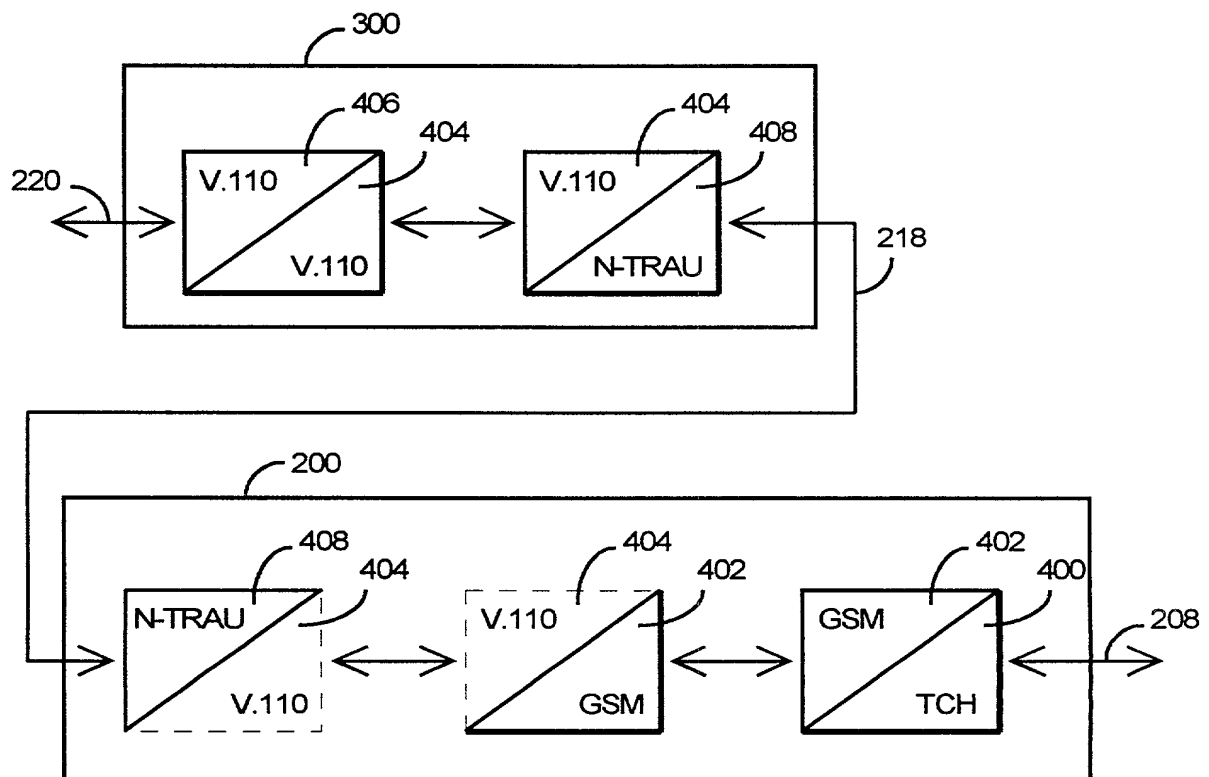


Fig. 4b

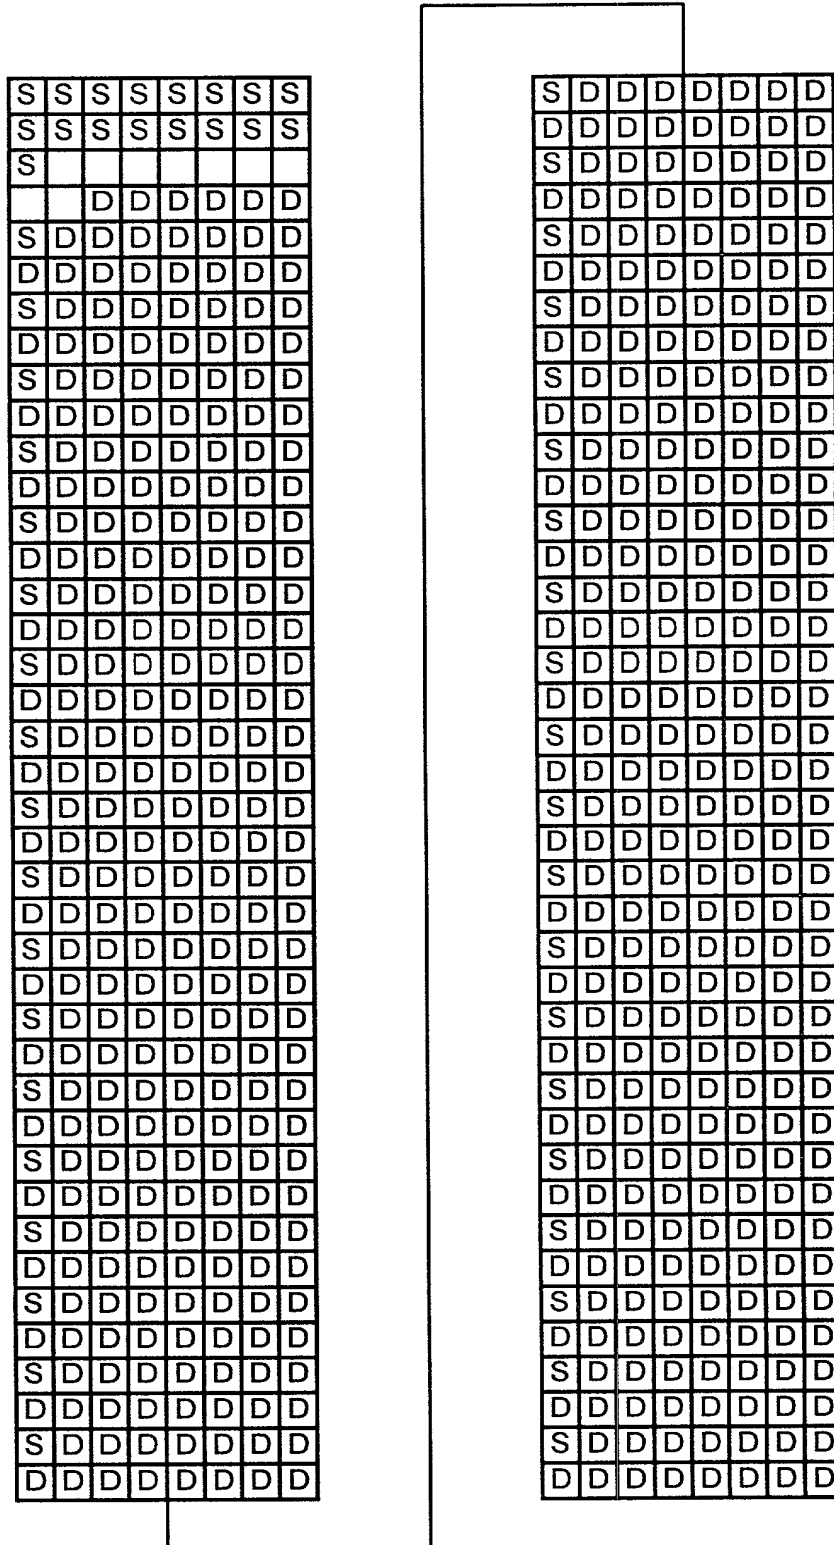


Fig. 5

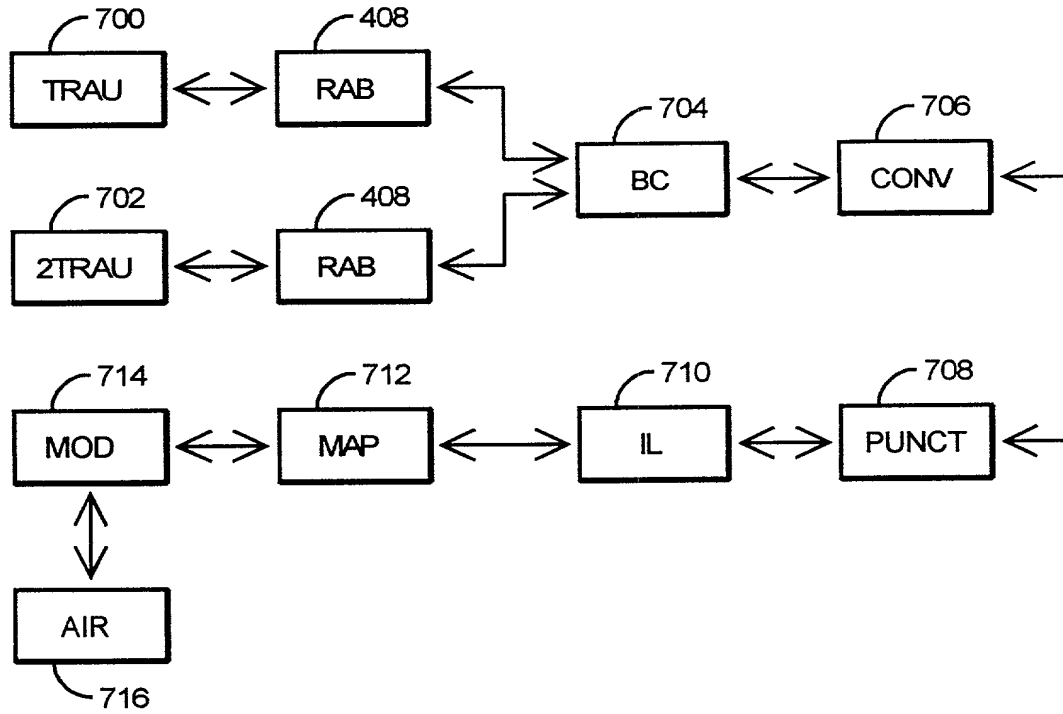


Fig. 7

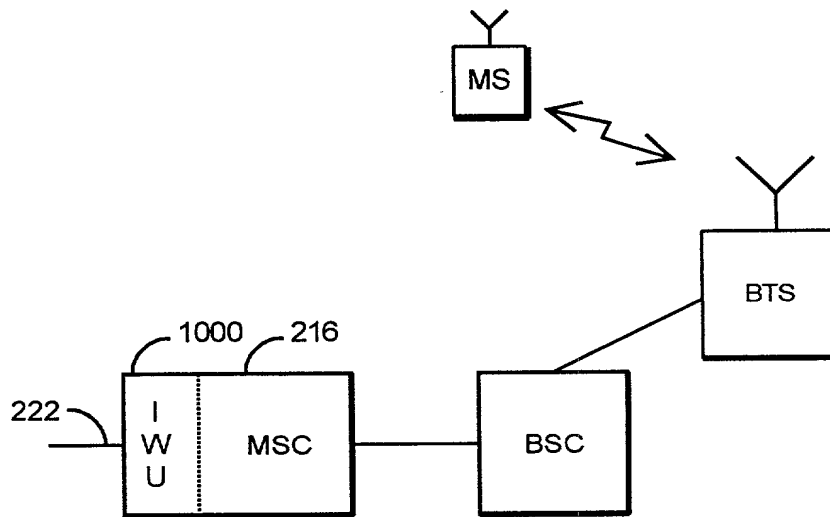


Fig. 10

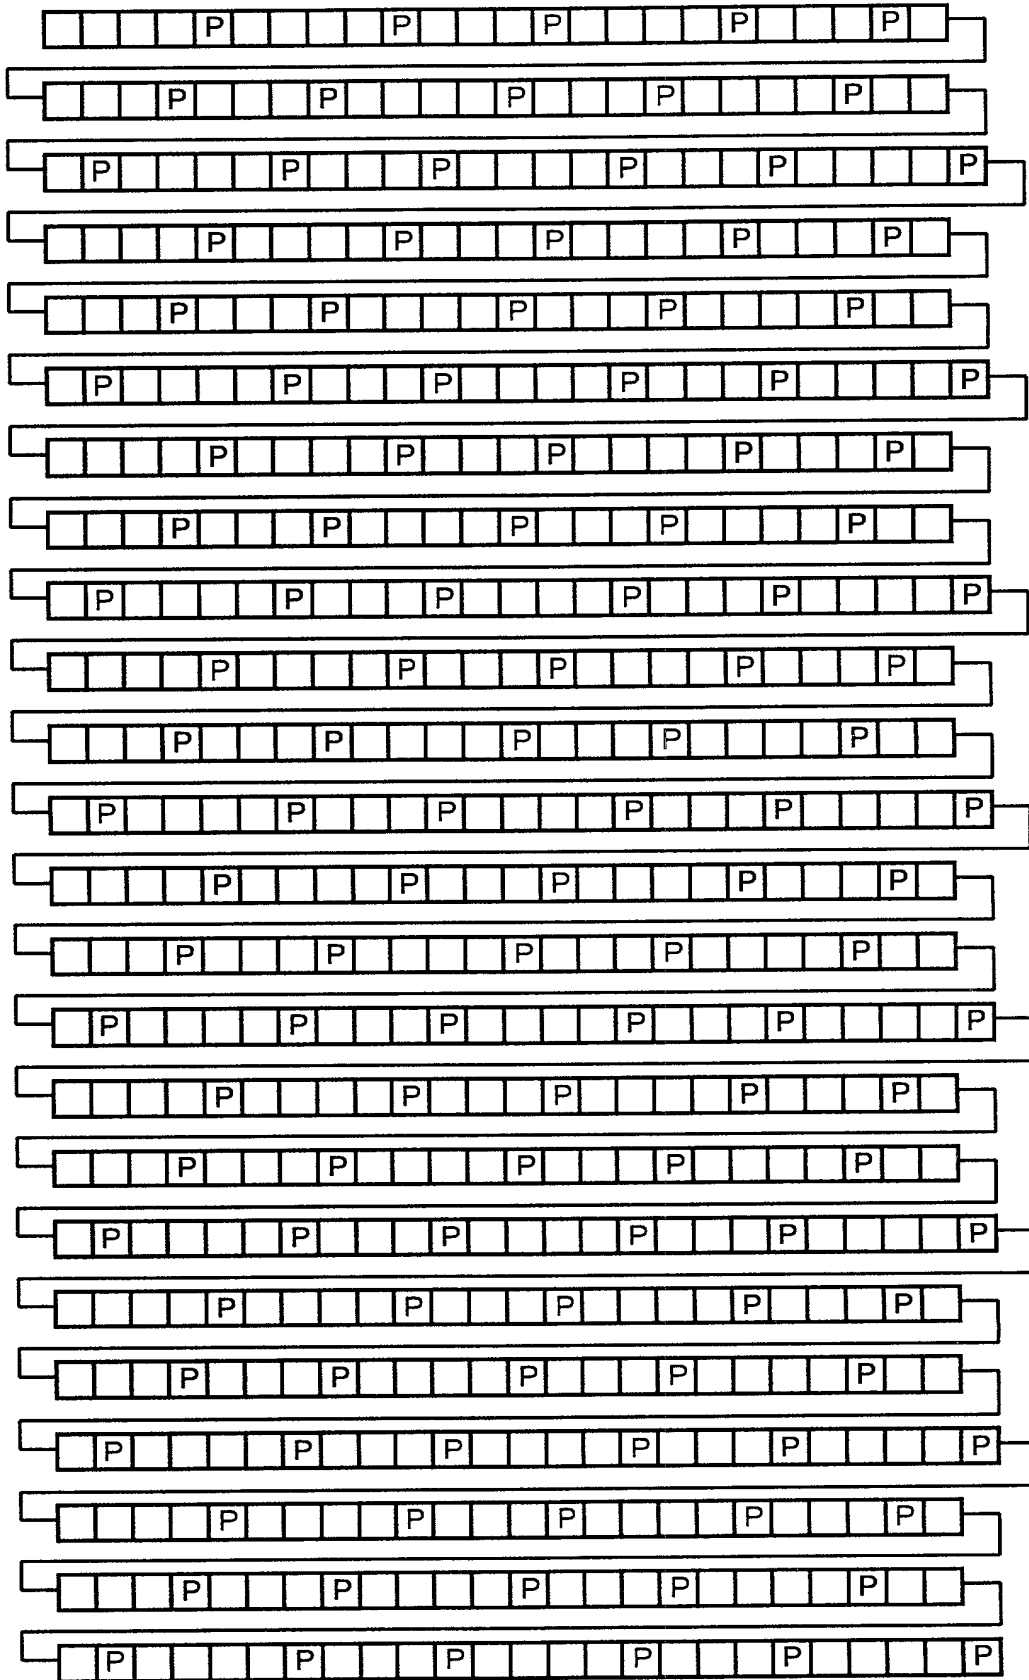


Fig. 8

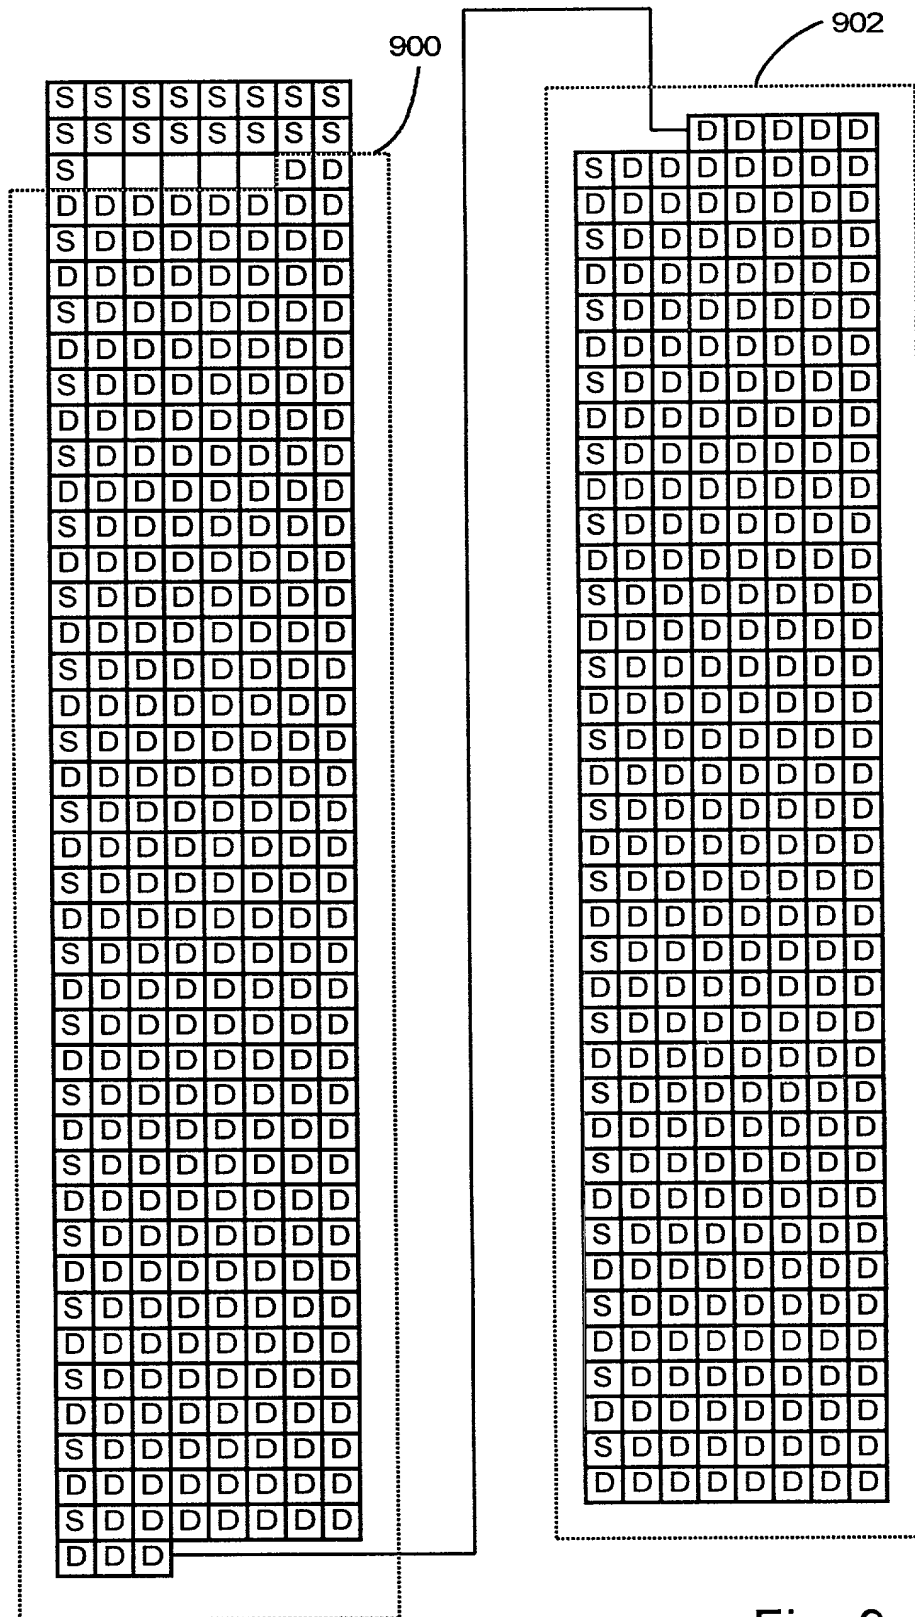


Fig. 9a

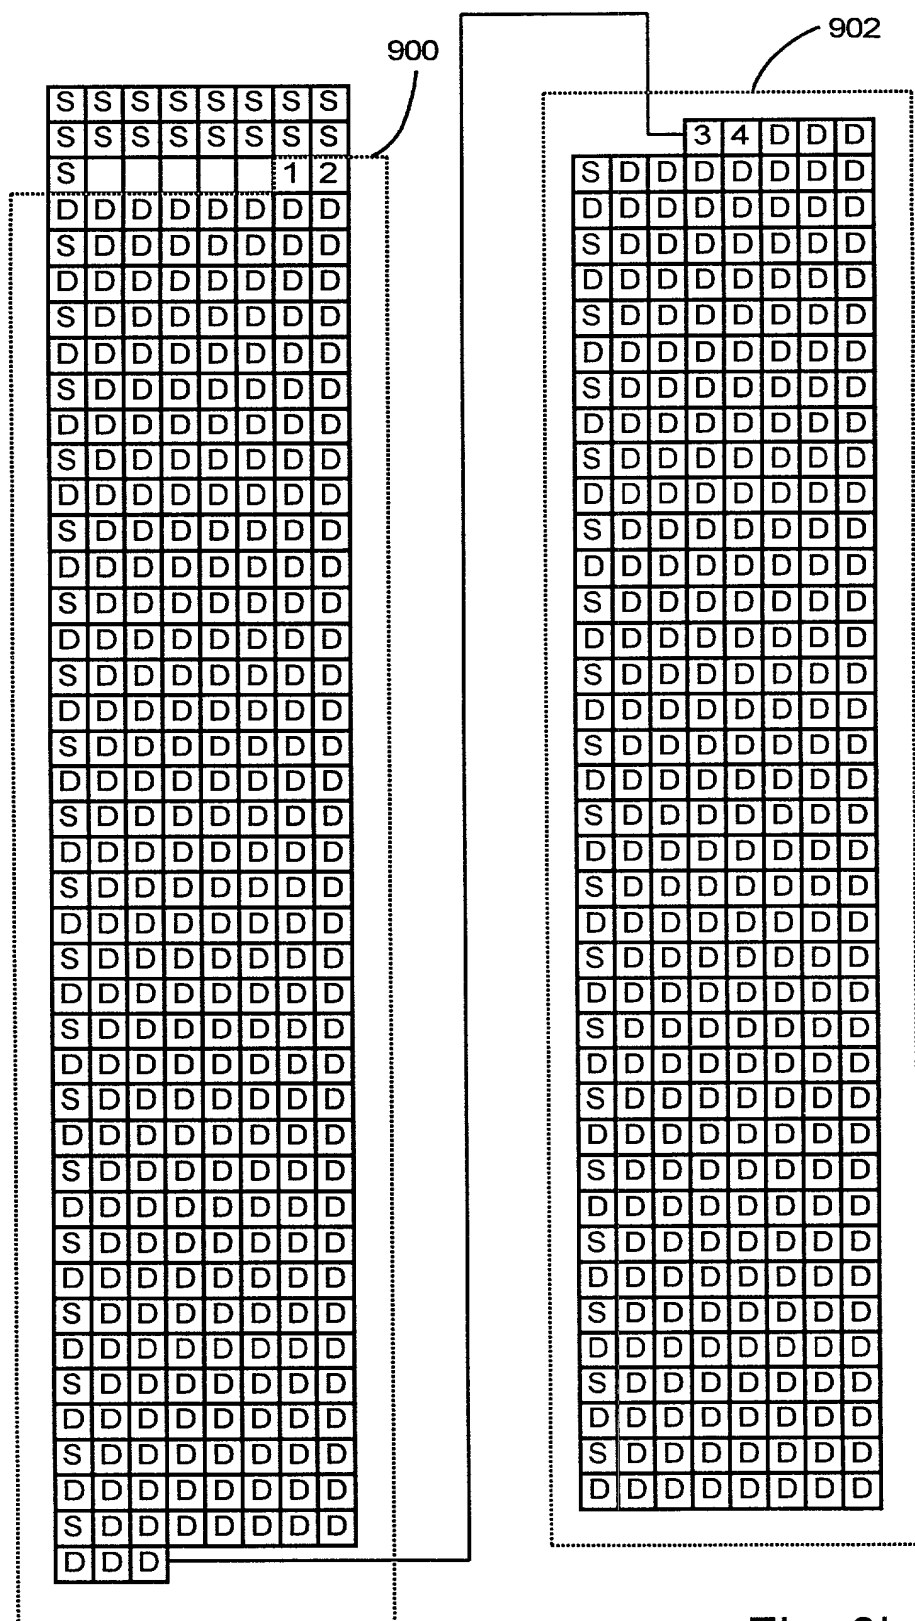


Fig. 9b

As a below named inventor, I hereby declare that my residence, post office address and citizenship are as stated below next to my name, and I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the INVENTION ENTITLED

Data transmission method

the specification of which (CHECK applicable BOX(ES))

X -> [] is attached hereto.

BOX(ES) -> [] was filed on _____ as U.S. Application No. 0 /
-> [X] was filed as PCT International Application No. PCT/ FI96/ 00585 on 31 October 1996

-> -> and (if U.S. or PCT application amended) was amended on _____

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose all information known to me to be material to patentability as defined in 37 C.F.R. 1.56. I hereby claim foreign priority benefits under 35 U.S.C. 119/365 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate filed by me or my assignee disclosing the subject matter claimed in this application and having a filing date (1) before that of the application on which priority is claimed, or (2) if no priority claimed, before the filing date of this application:

PRIOR FOREIGN APPLICATION(S)

<u>Number</u>	<u>Country</u>	<u>Day/MONTH/Year Filed</u>	<u>Date first Laid- open or Published</u>	<u>Date Patented or Granted</u>	<u>Priority Claimed</u> <u>Yes</u> <u>No</u>
955206	Finland	31 October 1995			X

I hereby claim domestic priority benefit under 35 U.S.C. 119/120/365 of the indicated United States applications listed below and PCT international applications listed above or below and, if this is a continuation-in-part (CIP) application, insofar as the subject matter disclosed and claimed in this application is in addition to that disclosed in such prior applications, I acknowledge the duty to disclose all information known to me to be material to patentability as defined in 37 C.F.R. 1.56 which became available between the filing date of each such prior application and the national or PCT international filing date of this application:

PRIOR U.S. PROVISIONAL, NONPROVISIONAL AND/OR PCT APPLICATION(S)

<u>Application No. (series code/serial no.)</u>	<u>Day/MONTH/Year Filed</u>	<u>Status</u> <u>pending, abandoned, patented</u>	<u>Priority Claimed</u> <u>Yes</u> <u>No</u>
---	-----------------------------	--	---

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

And I hereby appoint Cushman Darby & Cushman Intellectual Property Group of Pillsbury Madison & Sutro LLP, 1100 New York Avenue, N.W., Ninth Floor, East Tower, Washington, D.C. 20005-3918, telephone number (202) 861-3000 (to whom all communications are to be directed); and the below-named persons (of the same address) individually and collectively my attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith and with the resulting patent, and I hereby authorize them to delete names/numbers below of persons no longer with their firm and to act and rely on instructions from and communicate directly with the person/assignee/attorney/firm/ organization who/which first sends/sent this case to them and by whom/which I hereby declare that I have consented after full disclosure to be represented unless/until I instruct the above firm and/or a below attorney in writing to the contrary.

Paul N. Kokulis	16773	David W. Brinkman	20817	Paul E. White, Jr.	32011	Stephen C. Glazier	31361
Raymond F. Lippitt	17519	George M. Sirilla	18221	Michelle N. Lester	32331	Paul F. McQuade	31542
G. Lloyd Knight	17698	Donald J. Bird	25323	Jeffrey A. Simenauer	31993	Barry L. Grossman	30844
Carl G. Love	18781	W. Warren Taltavull	25647	G. Paul Edgell	24238	Ruth N. Morduch	31044
Edgar H. Martin	20534	Peter W. Gowdey	25872	Lynn E. Eccleston	35861		
William K. West, Jr.	22057	Dale S. Lazar	28872	David A. Jakopin	32995		
Kevin E. Joyce	20508	Glenn J. Perry	28458	Mark G. Paulson	30793		
Edward M. Prince	22429	Kendrew H. Colton	30368	Timothy J. Klima	34852		

1. INVENTOR'S SIGNATURE: _____ Date 29.4.1998

Inventor's Name (typed) Riku Pirhonen Finland
First Middle Initial Family Name Country of Citizenship
Residence (City) Irving, Texas 75039 USA
Post Office Address (Include Zip Code) 6223 Love Drive 2027, Irving, Texas 75039, USA

2. INVENTOR'S SIGNATURE: _____ Date 21.4.1998

Inventor's Name (typed) Pekka Ranta Finland
First Middle Initial Family Name Country of Citizenship
Residence (City) Nummela Finland
Post Office Address (Include Zip Code) Tiesmäenpolku 4, FIN-03100 Nummela, Finland

3. INVENTOR'S SIGNATURE: _____ Date 17.4.1998

Inventor's Name (typed) Jyri Suvenen Finland
First Middle Initial Family Name Country of Citizenship
Residence (City) Helsinki Finland
Post Office Address (Include Zip Code) Väinö Auerin katu 1 G 24, FIN-00560 Helsinki, Finland

(FOR ADDITIONAL INVENTORS, check box [] and attach sheet (CDC-116.2) for same information for each re signature, name, date, citizenship, residence and address.)

11. ☐ Attached:
12. ☐ Preliminary Amendment:
13. ☒ Basic U.S. National fee per Rule 492(a)(1)-(4) was previously timely filed.:
14. **Calculation of remaining fees due (if any):** based on amended claim(s) per above item
☐ 12 (above) or item(s) in PAT-112 (filed previously) ☐ 12 ☐ 14 ☐ 17 ☐ 25
15. **CLAIMS FEES** ☐ previously paid ☒ paid herewith as follows:

				Large/Small Entity		Fee Code
16. Total Effective Claims	33	minus 20 =	13	x \$22/\$11	+286	966/967
17. Independent Claims	2	minus 3 =	0	x \$82/\$41	+0	964/965
18. If any proper multiple dependent claim (ignore improper) is present,				\$270/\$135	+270	968/969
19. Filing Declaration late, fee paid <input type="checkbox"/> previously <input checked="" type="checkbox"/> now				\$130/\$65	+130	154/254
20.				SUBTOTAL	\$686	
21. Original due date:	September 12, 1998					
22. Petition is hereby made to extend the original due date to	(1 mo)	\$110/\$55 =	+0			115/215
Cover the date this response is filed for which the requisite fee	(2mos)	\$400/\$200 =				116/216
is attached	(3mos)	\$950/\$475 =				117/217
	(4mos)	\$1510/\$755 =				118/218
23. If "non-English" box 3 is X'd, add Rule 17(k) processing fee		\$130	+0			139
24. If "assignment" box 6 is X'd, add recording fee.		\$40	+40			581
25.				TOTAL FEE ENCLOSED =	\$726	

CHARGE STATEMENT: The Commissioner is hereby authorized to charge any fee specifically authorized hereafter, or any missing or insufficient fee(s) filed, or asserted to be filed, or which should have been filed herewith or concerning any paper filed hereafter, and which may be required under Rules 16-18 (missing or insufficient fee only) now or hereafter relative to this application and the resulting Official document under Rule 20, or credit any overpayment, to our Account/Order Nos. shown in the heading hereof for which purpose a duplicate copy of this sheet is attached.

This CHARGE STATEMENT does not authorize charge of the issue fee until/unless an issue fee transmittal form is filed.

Pillsbury Madison & Sutro LLP
Intellectual Property Group
 By: Atty: David W. Benkman Reg. No. 20817
 1100 New York Avenue, N.W.
 Ninth Floor East Tower
 Washington, D.C. 20005-3918 Sig: [Signature] Fax: (202) 822-0944
 Tel: (202) 861-3000 Tel: (202) 861-3033
 DWB/kpc

NOTE: File in duplicate with PTO receipt (PAT-103A) and attachments